

INSTALLATION INSTRUCTIONS FOR GM 28-59 CHEVY DISC BRAKE CONVERSION KIT

PLEASE READ THESE INSTRUCTIONS COMPLETELY PRIOR TO INSTALLATION

This kit is designed to use the following General Motors rotors and calipers

Buick Apollo 76-77	Oldsmobile Cutlass 73-76
Buick Skylark 73-76	Oldsmobile Omega 75-77
Buick Regal 77	Pontiac Firebird 70-77
Cadillac Seville 75-77	Pontiac Grand Prix 73-77
Chevrolet Camaro 70-77	Chevrolet El Camino 71-77
Chevrolet Chevelle 73-76	GMC Sprint 71-77
Chevrolet Monte Carlo 73-77	
Chevrolet Nova 77	

This is only a partial listing of applicable GM models. Ask your local parts person if your not sure. They are Raybestos #4059/#4060 (right and left respectively thru 76) and #4113/#4114 for 77.

- 1) Remove early Chevy drums, brakes and backing plates from spindles. Make sure you retain the bearing nut and keyed washer.
- 2) Thoroughly clean grease and dirt from spindle. Check for cracks or damage.
- 3) Using one of the original bolts in the forward hole re-install the steering arm in its stock location on the spindle. Using the hardware supplied in the kit install the caliper mounting bracket on the rear of the spindle as shown in the figure. Insert the $\frac{1}{4}$ " thick round spacers between the bracket and the spindle. Check for adequate clearance between the bracket and spindle. Trim bracket if necessary.
- 4) Examine the inner wheel bearing seating area on the spindle for nicks, etc. Emery cloth area as required for a smooth surface.
- 5) Slide bearing adapter on spindle and drive into place using a hammer and a piece of tubing or pipe of suitable dimensions ($1\frac{1}{2}$ " pipe works great). DO NOT DAMAGE THE ADAPTER WHILE INSTALLING (use a rag for padding between tool and adapter). Drive adapter on until it seats firmly against spindle inner bearing shoulder.
- 6) Remove bearings and inner seal from GM rotor. Remove GM inner bearing race and replace both the race and inner bearing assembly with that from a 71-80 Pinto or 70-78 Mustang. This is a widely used Ford inner wheel bearing that is readily available. It is also known as an A-13 inner bearing and consists of a L68149 cone and a L68110 race. Install a standard GM inner seal (National #8871).

- 7) Install rotor on spindle making sure that inner bearing seats all the way onto bearing adapter.


NOTE: Bearings and adapter are machined to a $\pm .0005$ " tolerance. If bearing does not slide onto adapter easily it may be due to tolerance "stack-up". This can be rectified by a small amount of fine emery "paper-work" on the bearing seating surface of the adapter.

- 8) Install GM outer wheel bearing followed by the $3/4$ " I.D. x $1/4$ " spacer (supplied in kit) and then the stock Chevy keyed bearing retaining washer and retaining nut. Adjust bearings as required and install cotter key and bearing dust cover.
- 9) Clean and inspect caliper for damage, leaks, etc. Install caliper on mounting bracket WITH BLEEDER FITTING UP using stock GM mounting bolts. Make sure the bolts aren't bent or damaged before installing.
- 10) Fill the brake system with the correct fluid, bleed and inspect for leaks.
- 11) Check for any brake caliper/rotor/wheel interference.
- 12) A proportioning valve may be required.*

A WORD TO THE WISE -

You now have a front braking system far superior to the original installation. Because of this it is strongly advised that the front end supporting and locating system be adequate to absorb the increased braking loads. Since normal braking action may tend to spread the forward edges of the front tires apart it is essential that you check for bent tie rods at suitable intervals. This "spreading" of the front wheels results in a compressive type of loading on the tie rod and any "built in" bend may cause tie rod failure under severe braking.

*NOTE: IN ORDER TO PROVIDE CORRECT FRONT TO REAR BRAKING BALANCE WE SUGGEST USING A DUAL RESERVOIR DISC/DRUM TYPE MASTER CYLINDER COMPATABLE WITH THE VEHICLE FROM WHICH THE FRONT BRAKES WERE OBTAINED.

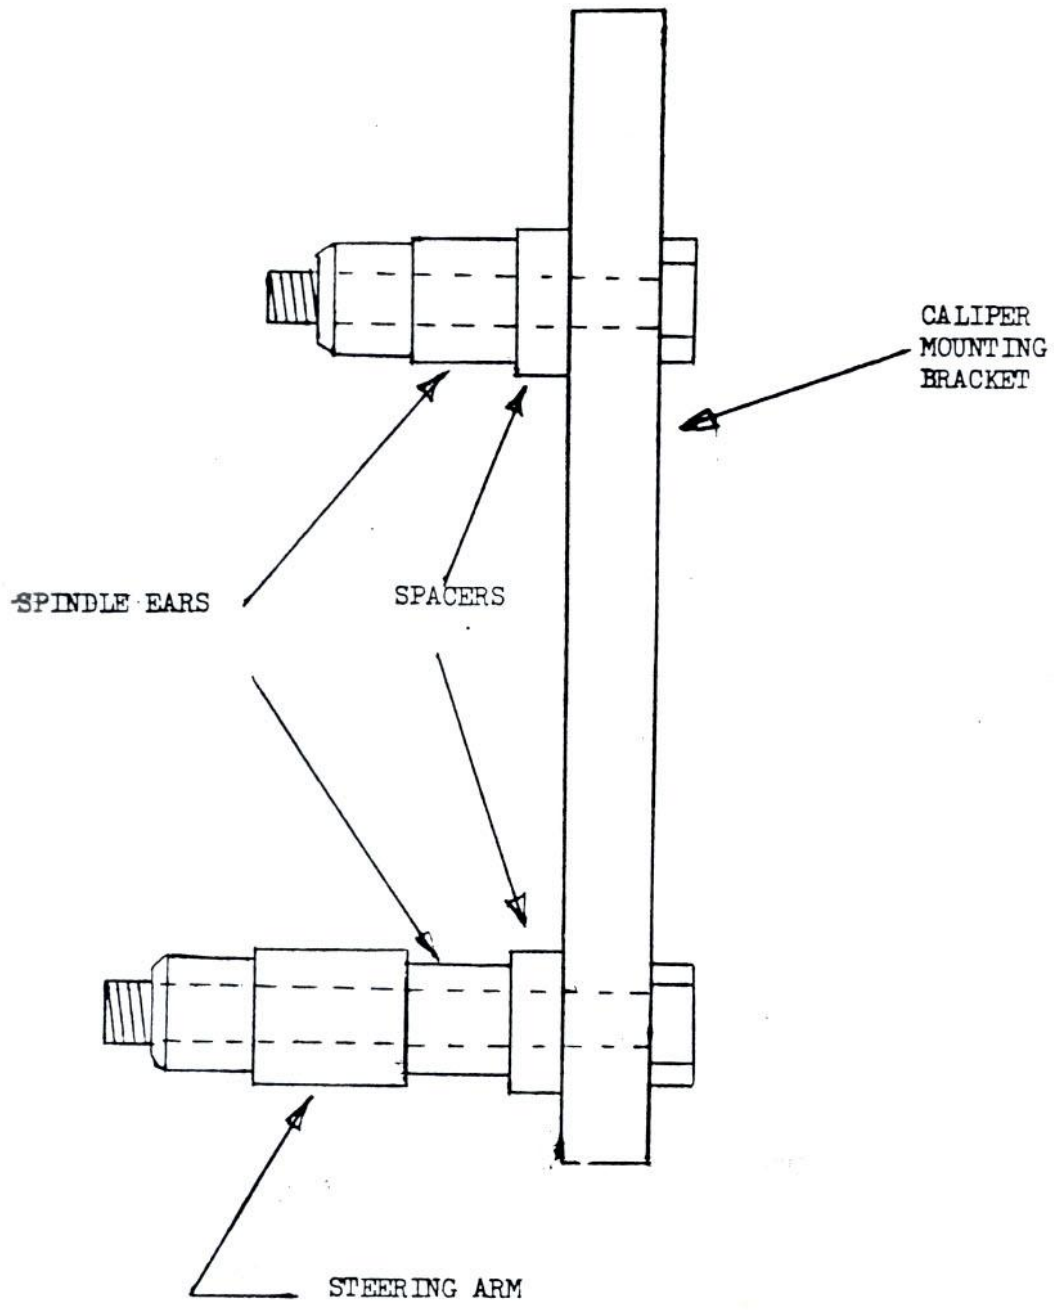

REAR VIEW R/H SIDE